

## Tuff Lite & Plastic Fittings

**Size:** 1/8" to 2"


**Materials:** Nylon  
Polypropylene  
Kynar

**Properties:** **Nylon** Fittings are generally acceptable for working pressures up to 150 psi (10 bar) at normal room temperatures. At very low pressures temperatures can approach 175°F or 79°C with no degradation of the fittings strength. nylon fittings should not be used with acid based fertilisers, bromine, chlorine, flourine, hydrochloric acid, sulphuric acid and xylene. Made with material approved by FDA and NSF. Nylon should not be used with compressed gas.

**Polypropylene** should not be used with aromatic hydrocarbons, carbon tetra-chloride, petrol, hexane, kerosene, nitric acid, sodium hydrochloride, toluene, trichloroethylene or xylene. Polypropylene should not be used with compressed gas

**Details:**

- Nylon parts are White
- Polypropylene parts are Black
- Kynar (PVDF) parts are Tan

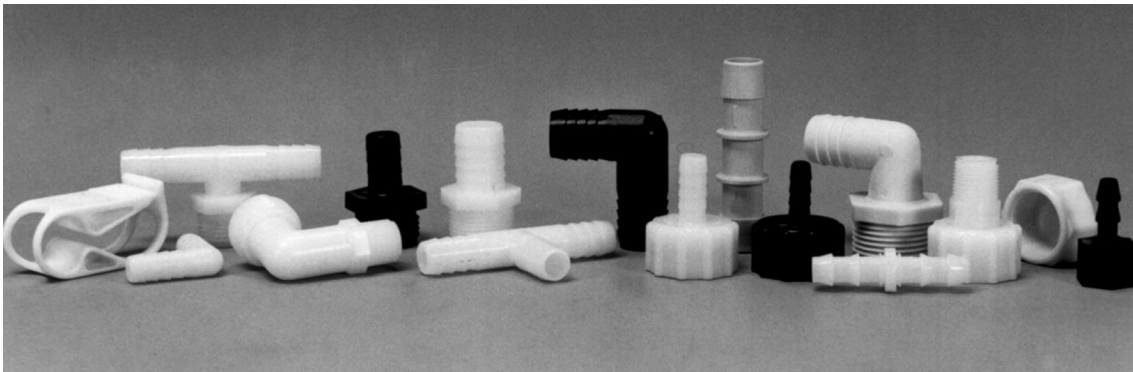

For more information on Tuff Lite and other plastic fittings requirements please contact Dixon on:

Telephone: +44 (0)1772 323529

Fax: +44 (0)1772 314664

Email: [enquiries@dixoneurope.co.uk](mailto:enquiries@dixoneurope.co.uk)